


STANDARD BI-FOLD

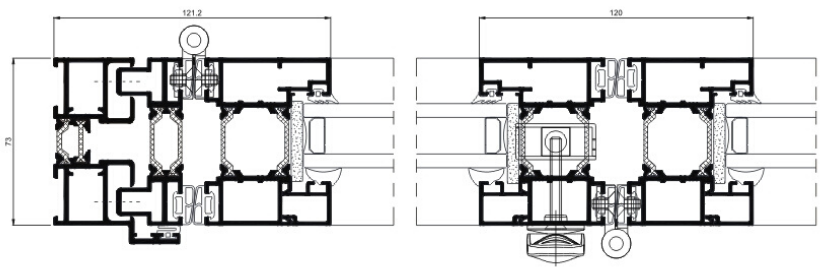

ENERGY EFFICIENCY

Thermal Transmission Coefficient

U_w from 1.1 (W/m²K)

Please consult typology, dimensions and glazing.

ACOUSTIC INSULATION

Maximum glazing: 45 mm

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (UNE-EN 12207:2000): Class 4

Water tightness (UNE-EN 12208:2000): Class 9A

Wind resistance (UNE-EN 12210:2000): Class A3

Reference test 2.70 x 2.53 m 3 Sashes

Security test (PAS 24:2012) Complies

Reference test 3 Sashes. Configuration 330 2,701 x 2,517 mm


STANDARD BI-FOLD

SECTIONS	Frame 73 mm Sash 73 mm
PROFILE THICKNESS	Door 1.8 mm
MAXIMUM DIMENSIONS	Width (L) = 1,200 mm Height (H) = 3,000 mm
MAXIMUM WEIGHT/SASH	120 Kg

Please consult regarding maximum weight and dimensions according to types

FINISHES	<p>Colour powder coating (RAL, mottled, rough...) According to Qualicoat >60 microns</p> <p>Wood effect powder coating According to Qualideco standard</p> <p>Anodized According to Ewwa Euras Standard Class 15 Optionally Class 20 and 25</p> <p>Optionally bicoloured</p>
----------	---

EXTRUSION ALLOY
6063 T-5
POLYAMIDE STRIP LENGTH
Polyamide 6.6 reinforced with 25% fiberglass: Frame 20 mm Sash 30 mm
OPENING POSSIBILITIES
Interior: 1 to 14 sashes Exterior: 1 to 14 sashes Possibility of corner sash at 90° without mullion
ACCESSIBILITY
Possibility of embedded low threshold

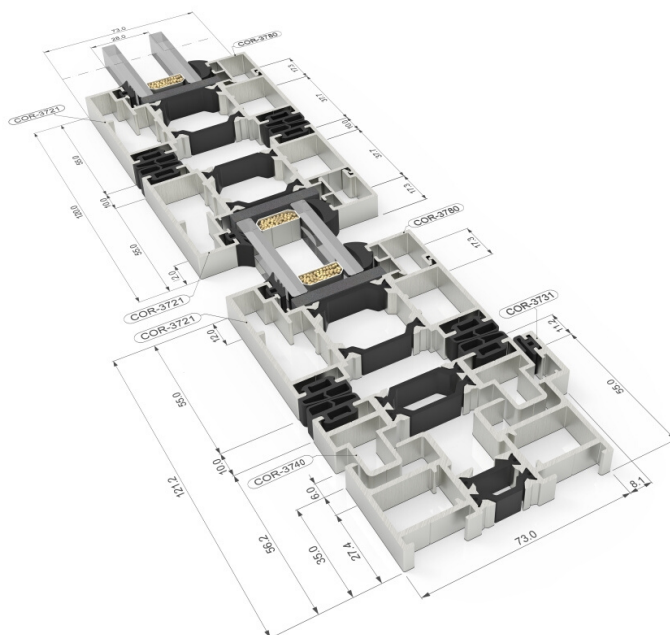

920095, Șos. Călărași, km 93
Mun. Slobozia, Jud. Ialomița
România | Hamilton Business
Center, corp 5

QUALITY DRIVEN