


BASIC COR 3000 RPT

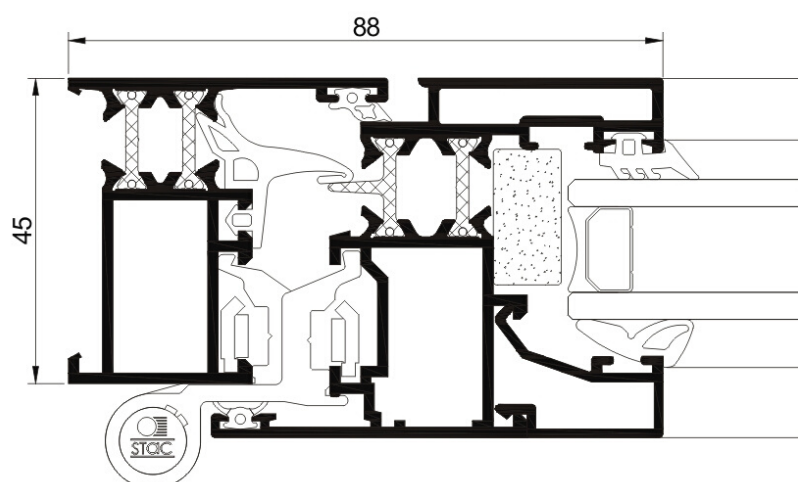

ENERGY EFFICIENCY

Thermal Transmission Coefficient

U_w from 1.3 (W/m^2K)

Please consult typology, dimensions and glazing.

ACOUSTIC INSULATION

Maximum glazing: 31 mm

Maximum acoustic insulation: $R_w = 46$ dB

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (UNE-EN 12207:2000): Class 4

Water tightness (UNE-EN 12208:2000): Class 9A

Wind resistance (UNE-EN 12210:2000): Class C5

Reference test window 1.18 x 1.18 m 2 Sashes

