


MINIMAL COR 60 HIDDEN SASH

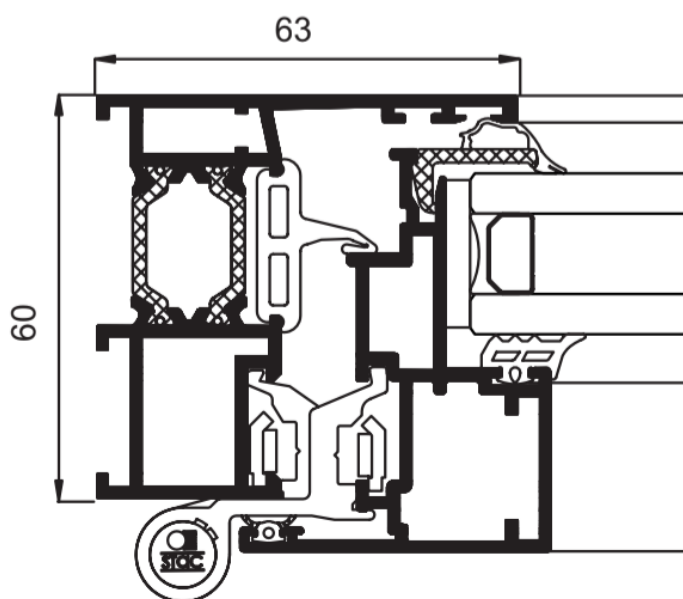

ENERGY EFFICIENCY

Thermal Transmission Coefficient

Uw from 1.5 (W/m²K)

Please consult typology, dimensions and glazing.

ACOUSTIC INSULATION

Maximum glazing: 28 mm

Maximum acoustic insulation: Rw = 41 dB

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (UNE-EN 12207:2000): Class 4

Water tightness (UNE-EN 12208:2000): Class 9A

Wind resistance (UNE-EN 12210:2000): Class C5

Reference test window 1.13 x 1.16 m 1 Sash


MINIMAL COR 60 HIDDEN SASH

SECTIONS	Frame 60 mm Sash 60 mm
PROFILE THICKNESS	Window 1.6 mm Balcony 1.6 mm
MAXIMUM DIMENSIONS	Width (L) = 1,300 mm Height (H) = 2,400 mm
MAXIMUM WEIGHT/SASH	160 Kg

Please consult maximum dimensions according to types

FINISHES	<p>Colour powder coating (RAL, mottled, rough...) According to Qualicoat >60 microns</p> <p>Wood effect powder coating According to Qualideco standard</p> <p>Anodized According to Ewwa Euras Standard Class 15 Optionally Class 20 and 25</p> <p>Optionally bicoloured</p>
HARDWARE	<p>Optionally concealed hinges</p> <p>Optionally security hardware</p>

EXTRUSION ALLOY	6063 T-5
POLYAMIDE STRIP LENGTH	Polyamide 6.6 reinforced with 25% fiberglass: 24 mm
GASKETS	EPDM triple gasket
FOAMS	Perimeter polyolefin foam in glazing rebate zone
OPENING POSSIBILITIES	INWARDS Side hung, tilt and turn&tilt

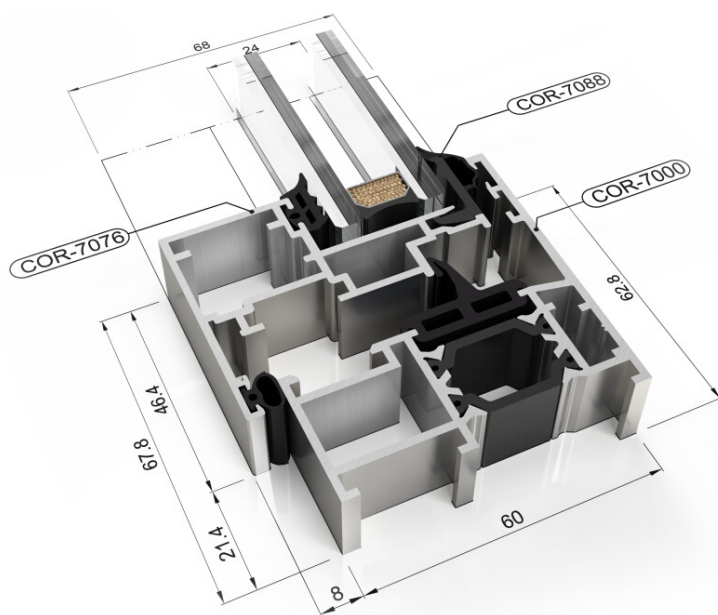

920095, Șos. Călărași, km 93
Mun. Slobozia, Jud. Ialomița
România | Hamilton Business
Center, corp 5

QUALITY DRIVEN