


BASIC COR 60 RPT

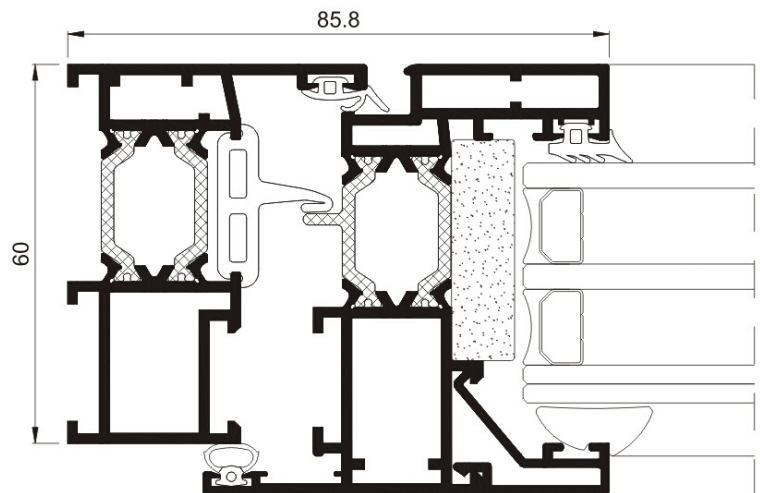

ENERGY EFFICIENCY

Thermal Transmission Coefficient

U_w from 1.0 (W/m^2K)

Please consult typology, dimensions and glazing.

ACOUSTIC INSULATION

Maximum glazing: 46 mm

Maximum acoustic insulation: $R_w = 48$ dB

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (UNE-EN 12207:2000): Class 4

Water tightness (UNE-EN 12208:2000): Class E1200

Wind resistance (UNE-EN 12210:2000): Class C5

Reference test window 1.20 x 1.16 m 2 Sashes


BASIC COR 60 RPT

SECTIONS	Frame 60 mm Sash 68 mm
PROFILE THICKNESS	Window 1.6 mm Balcony 1.6 mm
MAXIMUM DIMENSIONS	Width (L) = 1,500 mm Height (H) = 2,600 mm
MAXIMUM WEIGHT/SASH	160 Kg

Please consult maximum dimensions according to types

FINISHES	Colour powder coating (RAL, mottled, rough...) According to Qualicoat >60 microns Wood effect powder coating According to Qualideco standard Anodized According to Ewva Euras Standard Class 15 Optionally Class 20 and 25 Optionally bicoloured
HARDWARE	Optionally concealed hinges Optionally security hardware

EXTRUSION ALLOY	
6063 T-5	
POLYAMIDE STRIP LENGTH	
Polyamide 6.6 reinforced with 25% fiberglass: 24 mm	
GASKETS	
EPDM triple gasket	
FOAMS	
Perimeter polyolefin foam in glazing rebate zone	
OPENING POSSIBILITIES	
INWARDS	Side hung, turn&tilt, bi-fold, tilt and parallel-tilt
OUTWARDS	Side hung, top hung and pivoting on horizontal or vertical axis.

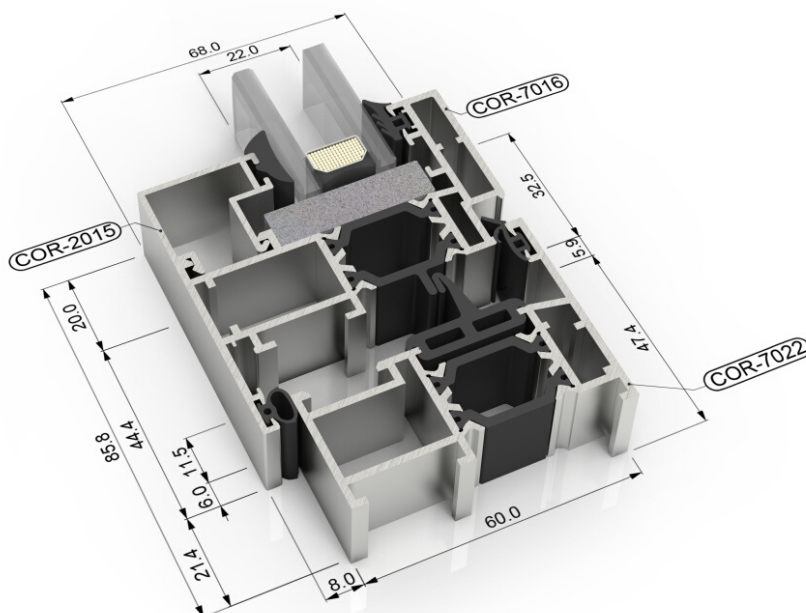

920095, Șos. Călărași, km 93
Mun. Slobozia, Jud. Ialomița
România | Hamilton Business
Center, corp 5

QUALITY DRIVEN