
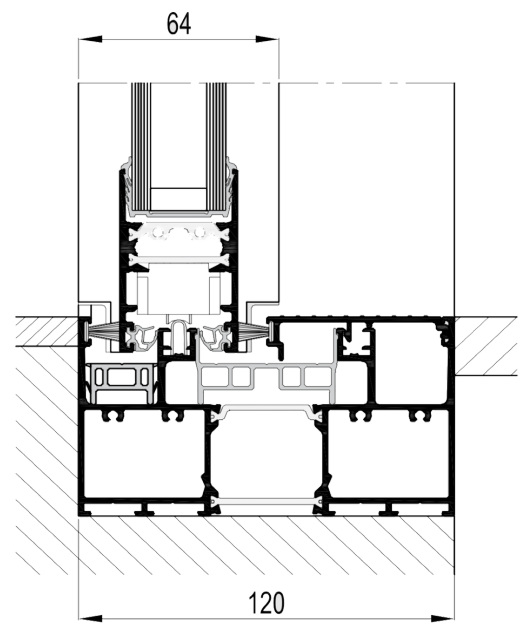


BASIC SLIMPATIO 68

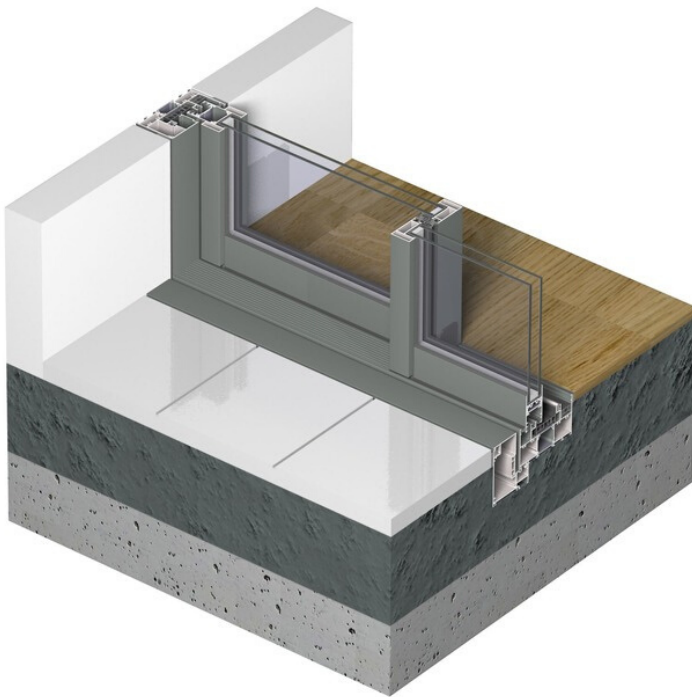

SlimPatio 68 is a highly insulated sliding system with ultra slim profiles and a concealed frame that combines comfort with elegance. Thanks to the clever design, this sliding window allows maximum natural light and provides optimal panoramic views. The integrated innovative technologies guarantee ultimate performance with regard to wind-, water tightness and thermal insulation meeting the highest standards.

FLEXIBILITY ABOVE ALL

This sliding system offers a wide range of opening possibilities, from elements which slide over 2- and 3-rail solutions, allowing you to open up to 6 leaves, over a very slim central closing option of only 74 mm wide, to a single- and double rail pocket solution that allows you to slide the elements into the wall.



TECHNICAL CHARACTERISTICS

Variants	2-RAIL	3-RAIL
Visible width	Built-in frame	68 mm
	Vent	34 mm
	Meeting section	34 mm
Overall system depth	Frame	120 mm
	Vent	60 mm
Maximal vent height	2700 mm	
Maximal vent weight	250 kg	
Rebate height	18 mm	
Glass thickness	from 24 up to 36 mm	
Glazing method	with EPDM in accordance with the envelope principle	
Thermal insulation	32 mm and 36 mm fiberglass reinforced polyamide strips	

PERFORMANCES

ENERGY								
Thermal insulation (1) EN ISO 10077-2	Uf-value down to 2.4 W/m ² K, depending on the frame/vent combination Uw-value down to 1.2 W/m ² K, for 3000mm x 2500mm frame/vent combination (U _g =0.8 W/m ² K)							
COMFORT								
Acoustic performance (2) EN ISO 140-3; EN ISO 717-1	R _w (C; C _{tr}) = 40 (-2;-4) dB							
Air tightness, max. test pressure (3) EN 12207	1 (150 Pa)		2 (300 Pa)		3 (600 Pa)		4 (600 Pa)	
Water tightness (4) EN 1027; EN 12208	1B (0 Pa)	2B (50 Pa)	3B (100 Pa)	4B (150 Pa)	5B (200 Pa)	6B (250 Pa)	7B (300 Pa)	8A (450 Pa)
Wind load resistance, max. test pressure (5) EN 12211; EN 12210	1 (400 Pa)		2 (800 Pa)		3 (1200 Pa)		4 (1600 Pa)	
Wind load resistance to frontal deflection EN 12211; EN 12210	A (≤ 1/150)		B (≤ 1/200)			5 (2000 Pa)		
							C (≤ 1/300)	

This table shows classes and values of performances, which can be achieved for specific configurations and opening types.

- (1) The Uf-value measures the heat flow. The lower the Uf-value, the better the thermal insulation of the frame.
- (2) The sound reduction index (R_w) measures the capacity of the sound reduction performance of the frame and glass.
- (3) The air tightness test measures the volume of air that would pass through a closed window at a certain air pressure.
- (4) The water tightness testing involves applying a uniform water spray at increasing air pressure until water penetrates the window.
- (5) The wind load resistance is a measure of the profile's structural strength and is tested by applying increasing levels of air pressure to simulate the wind force.



920095, Șos. Călărași, km 93
Mun. Slobozia, Jud. Ialomița
România | Hamilton Business
Center, corp 5

QUALITY DRIVEN