


# MINIMAL COR 70 HIDDEN SASH

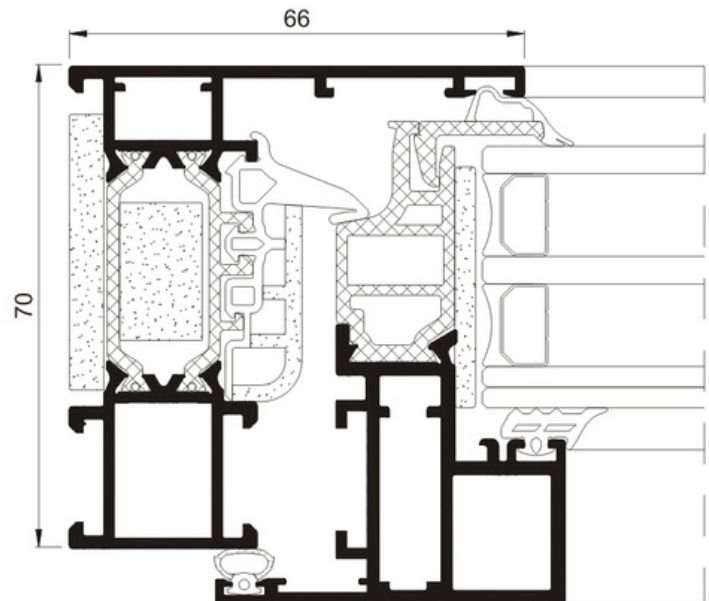

## ENERGY EFFICIENCY

Thermal Transmission Coefficient

$U_w$  from 1.0 ( $W/m^2K$ )

*Please consult typology, dimensions and glazing.*

## ACOUSTIC INSULATION

Maximum glazing: 40 mm

Maximum acoustic insulation:  $R_w = 46$  dB

## CATEGORIES ACHIEVED AT TEST CENTRE

*Protection against atmospheric agents*

Air permeability (UNE-EN 12207:2000): Class 4

Water tightness (UNE-EN 12208:2000): Class E1650

Wind resistance (UNE-EN 12210:2000): Class C5

*Reference test window 1.23 x 1.48 m 1 Sash*


# MINIMAL COR 70 HIDDEN SASH

SECTIONS	Frame 70 mm Sash 70 mm
PROFILE THICKNESS	Window 1.9 mm
MAXIMUM DIMENSIONS	Width (L) = 1,300 mm Height (H) = 2,400 mm
MAXIMUM WEIGHT/SASH	160 Kg

Please consult maximum dimensions according to types

FINISHES	<p>Colour powder coating (RAL, mottled, rough...) According to Qualicoat &gt;60 microns</p> <p>Wood effect powder coating According to Qualideco standard</p> <p>Anodized According to Ewwa Euras Standard Class 15 Optionally Class 20 and 25</p> <p>Optionally bicoloured</p>
HARDWARE	<p>Optionally concealed hinges</p> <p>Optionally security hardware</p>

EXTRUSION ALLOY	
6063 T-5	
POLYAMIDE STRIP LENGTH	
Polyamide 6.6 reinforced with 25% fiberglass: 35 mm	
GASKETS	
EPDM triple gasket	
FOAMS	
Perimeter polyolefin foam in glazing rebate zone	
OPENING POSSIBILITIES	
INWARDS	Side hung, tilt, turn&tilt

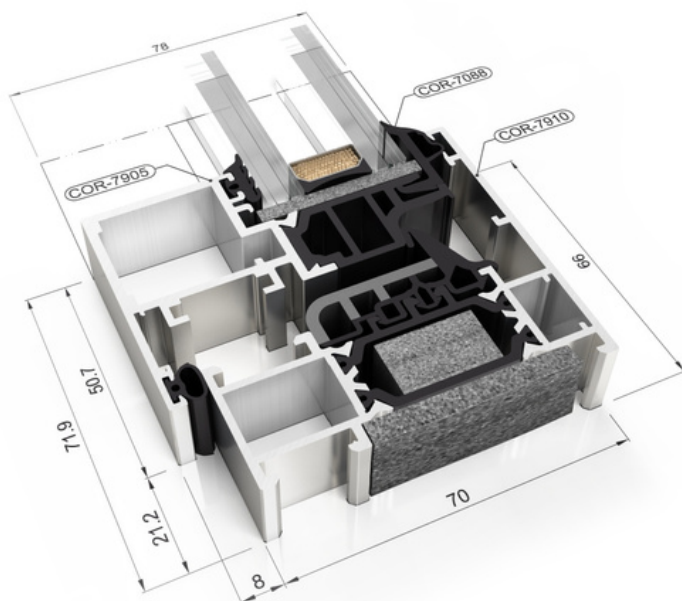

Str. Păsărilor nr. 2  
Moara Vlasiei, Ilfov  
office@techline.ro  
+40 767 444 000